

Eucaply

Overview


The Eucaply is a hardwood plywood with uniform multilaminate construction, suitable for an array of applications when resistance, edging exposure, and or outdoor usage are needed. Sourced from an exclusive generation specie of Eucalyptus, this product is considered the best alternative to Russian Birch, due to its multiple technical tests' approval performance and competitive pricing.

Common Applications



Construction

Face: Eucalyptus Long Grain
Core: Eucalyptus Long and Short Grain
Back: Eucalyptus Long Grain
Veneers type: Rotary Cut, Whole piece on Long Grain
Glue type: Phenolic

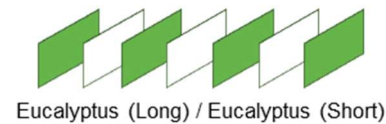

Measurement and Tolerances

	4'x8'		5'x 5'	
Dimension	Imperial	Metric ± Tolerance	Imperial	Metric ± Tolerance
Length	96 ½"	2450 mm ± 5mm	60 ½"	1540 mm ± 5mm
Width	48 ½"	1230 mm ± 5mm	60 ½"	1540 mm ± 5mm
Thickness		± 0.20mm		± 0.20mm

Finishing, Grading

Sanded #180 Grit

Common Grades: B/C, B/B, C/C.

Packaging (4'x8' panels reference)

Thickness (mm)	Ply	Sheets/unit	Weight/panel	Weight/unit	Loading (Units/Dryvan)
4.7	5	190	20 lbs.	3,700 lbs.	12
9.0	7	97	38 lbs.	3,700 lbs.	12
12.0	9	78	47 lbs.	3,700 lbs.	12
15.0	11	62	60 lbs.	3,700 lbs.	12
18.0	13	52	71 lbs.	3,700 lbs.	12

Certifications *

CARB2

EPA TSCA Title VI

Lacey Act

/

* FSC Under Request